




## AQUOR® MOUNTING BLOCK

Provides a flat, smooth mounting surface for House Hydrant installation.


Integrated flange with head-flashing install under siding for protection against water intrusion.

Ideal for a wide variety of siding types.

- 1) Attach frame to sheathing or WRB using outer screw holes.
- 2) Tape over flange with adhesive flashing tape, covering fasteners.
- 3) Secure block to wall using hydrant faceplate screws.
- 4) Butt siding against fiber cement block, covering flange.



- Stands 1" proud of surface.
- Fiber-cement block, same formula as top-tier siding.
- Will not degrade or rot like wood or other natural materials.
- Heavy-duty, UV-resistant and weather-proof ASA polymer frame.
- Precision cut holes via computer-controlled water jet.
- Mounting holes piloted at 5° angle to match hydrant grade.
- Mounting frame size: 8.25" x 9.5" x 1.25" (W x H x D)
- Fiber cement block size: 5.25" x 6.5" x 1.0" (W x H x D)

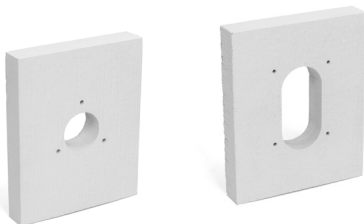

### AVAILABLE MODELS:

MODEL	COMPATIBILITY
MB11	House Hydrant V1, V1+
MB12	House Hydrant V2+

